

Mark Scheme (Results)

Summer 2024

Pearson Edexcel Advanced Level In Physics (9PH0) Paper 03: Advanced Physics III

## **Edexcel and BTEC Qualifications**

Edexcel and BTEC qualifications are awarded by Pearson, the UK's largest awarding body. We provide a wide range of qualifications including academic, vocational, occupational and specific programmes for employers. For further information visit our qualifications websites at <a href="https://www.edexcel.com">www.edexcel.com</a> or <a href="https://www.edexcel.com">www.edexcel.com</a>, you can get in touch with us using the details on our contact us page at <a href="https://www.edexcel.com/contactus">www.edexcel.com/contactus</a>.

## Pearson: helping people progress, everywhere

Pearson aspires to be the world's leading learning company. Our aim is to help everyone progress in their lives through education. We believe in every kind of learning, for all kinds of people, wherever they are in the world. We've been involved in education for over 150 years, and by working across 70 countries, in 100 languages, we have built an international reputation for our commitment to high standards and raising achievement through innovation in education. Find out more about how we can help you and your students at: <a href="https://www.pearson.com/uk">www.pearson.com/uk</a>

Summer 2024
Question Paper Log Number P74470A
Publications Code 9PH0\_03\_2406\_MS
All the material in this publication is copyright
© Pearson Education Ltd 2024

## **General Marking Guidance**

- All candidates must receive the same treatment. Examiners must mark the first candidate in exactly the same way as they mark the last.
- Mark schemes should be applied positively. Candidates must be rewarded for what they have shown they can do rather than penalised for omissions.
- Examiners should mark according to the mark scheme not according to their perception of where the grade boundaries may lie.
- There is no ceiling on achievement. All marks on the mark scheme should be used appropriately.
- All the marks on the mark scheme are designed to be awarded.
   Examiners should always award full marks if deserved, i.e. if the answer matches the mark scheme. Examiners should also be prepared to award zero marks if the candidate's response is not worthy of credit according to the mark scheme.
- Where some judgement is required, mark schemes will provide the principles by which marks will be awarded and exemplification may be limited.
- When examiners are in doubt regarding the application of the mark scheme to a candidate's response, the team leader must be consulted.
- Crossed out work should be marked UNLESS the candidate has replaced it with an alternative response.

<b>Question</b> <b>Number</b>	Acceptable Answer		Additional Guidance	Mark
1(a)	Positions of mass holder not recorded	(1)	Accept reference to not all raw data being recorded/shown	
	Data not recorded to the same sf/dp	(1)		2
1(b)	MAX 3 from:			
	Read the metre rule at eye level (to avoid parallax)	(1)	A labelled diagram could score MP3 and MP4	
	Bring the metre rule closer (to avoid parallax)	(1)		
	Use set square to read position of bottom of mass holder	(1)	Accept valid alternatives to set square e.g. reference to marker on mass holder <b>or</b> add marker to line and position metre rule underneath line	
	Use plumb line to check that metre rule is vertical	(1)	Accept valid alternatives to plumb line	
	Record positions of mass holder when loading and unloading and calculate mean value	(1)	Accept repeat readings of position and calculate a mean	3
1(c)(i)	<ul> <li>The value of stress at which the fishing line starts to deform permanently/plastically</li> <li>Or the value of stress at which the fishing line continues to extend with no additional force</li> </ul>	(1)	Accept point / strain for "value of stress" Accept line doesn't return to original length when force is removed	1
1(c)(ii)	• Use of $\varepsilon = \frac{\Delta x}{x}$	(1)	Example of calculation $\Delta x = 0.04 \times 2.0 \text{ m} = 0.08 \text{ m}$	1
	(Maximum) extension (before yielding) is 8 cm, so line doesn't yield	(1)		
	<b>Or</b> strain (at max extension) = $0.036$ , so line doesn't yield	(1)		2

(Total for Question 1 = 8 marks)

Question Number	Acceptable Answer		Additional Guidance	Mark
2(a)(i)	• Use of $V = \pi r^2 t$	(1)		
	• Use of half resolution to calculate % uncertainty in d	(1)		
	• % uncertainty in area = $2 \times (\% \text{ uncertainty in } d)$	(1)	Allow MP4 for use of full resolution if MP2 was withheld for not using half resolution	
	• Calculation of % uncertainty in <i>t</i>	(1)		
	• % uncertainty in <i>t</i> added to % uncertainty in area	(1)		
	• $V = 5.94 \times 10^{-7} \text{m}^3$	(1)		
	• $\% U = 0.4 \%$	(1)		7
			Example of calculation $V = \pi \left(\frac{22.16 \times 10^{-3} \text{m}}{2}\right)^{2} \times 1.54 \times 10^{-3} \text{m}$ $\therefore V = 5.94 \times 10^{-7} \text{m}^{3}$ $\% U = \left(2 \times \frac{0.005 \text{ mm}}{22.16 \text{ mm}} + \frac{0.005 \text{ mm}}{1.54 \text{ mm}}\right) \times 100\%$ $\% U = 0.36 \%$	

2(a)(ii)	EITHER		
	<ul> <li>Use of ρ = m/v (allow use of V from (a)(i))</li> <li>Calculation of % U in ρ</li> <li>Max density = 1.9 × 10<sup>4</sup> kg m<sup>-3</sup> (ecf from (a)(i))</li> </ul>	(1) (1)	For MP2, allow use of resolution if use of half resolution has already been penalised in (a)(i)
	<ul> <li>1.9 × 10<sup>4</sup> kg m<sup>-3</sup> &lt; 1.93 × 10<sup>4</sup> kg m<sup>-3</sup> so coin not pure gold</li> <li>Or comparison of calculated value of max density with density of gold and consistent conclusion</li> </ul>	(1) (1)	Allow a conclusion that states the values are similar so it might be gold
	OR  • Use of $\rho = \frac{m}{V}$ to calculate mass of pure gold coin	(1)	MP4, allow "density of pure gold" for $1.93 \times 10^4 \text{ kg m}^{-3}$
	<ul> <li>Mass of pure gold coin = 11.5 g (ecf from (a)(i))</li> <li>Use of half resolution to calculate max mass of coin being tested</li> </ul>	(1)	For MP3, allow use of resolution if use of half resolution has already been penalised in (a)(i)
	• 11.25 g < 11.5 g, so coin is not pure gold  Or comparison of maximum value of mass of coin with mass pure gold coin and consistent conclusion.	(1)	MP4: allow "density of pure gold" for $1.93 \times 10^4 \text{ kg m}^{-3}$
	• Use of $\rho = \frac{m}{v}$ to calculate volume of a pure gold coin with mass 11.2g	(1)	Example of calculation
	• Use of half resolution to calculate % U in mass (0.05/11.2 × 100% = 0.44 %), and hence calculated volume	(1)	$\rho = \frac{m}{V} = \frac{11.2 \times 10^{-3} \text{kg}}{5.94 \times 10^{-7} \text{m}^3} = 1.89 \times 10^4 \text{ kg m}^{-3}$
	<ul> <li>Find the <i>smallest</i> volume possible within uncertainty from part (i)</li> <li>5.83 x 10<sup>-7</sup> m<sup>3</sup> &lt; 5.91 x 10<sup>-7</sup> m<sup>3</sup>, so coin not pure gold</li> </ul>	(1)	% $U = \frac{0.05 \ g}{11.2 \ g} \times 100\% + 0.36\% = 0.81 \%$ ∴ range = ±1.89 × 10 <sup>4</sup> kg × 0.008 = ±152 kg m <sup>-3</sup>
	<b>Or</b> comparison of minimum value of volume of coin from part i with maximum volume of pure gold coin and consistent conclusion.	(1)	∴ max density = $18900 + 150 = 19050 \text{ kg m}^{-3}$

2(b)	<ul> <li>MAX 4</li> <li>Measure thickness of a stack of coins</li> <li>Or measure the mass of a stack of coins</li> <li>(Uncertainty remains the same, so) % U is reduced [MP2 dependent on MP1</li> </ul>	(1) (1)	MP1 accept measuring a number of coins side by side  MP1 accept using a balance with a higher resolution  MP2 as this would reduce the uncertainty	
	<ul> <li>Determine diameter/mass/thickness by repeating measurement and calculating a mean</li> <li>This reduces the effect of random errors</li> </ul>	(1) (1)	MP4 dependent on MP3	
	<ul> <li>Check and correct for zero error on calipers or balance</li> <li>This reduced the effect of systematic error</li> </ul>	(1) (1)	MP6 dependent on MP5	4

(Total for Question 2 = 15 marks)

Question Number		Acceptable Answer		Addit	tional Guidance		Mark
*3	coherent and logical structured answer with linkage and fully-sustained reasoning.		answer is str The following	ructured and	ndicative content a shows lines of rea ws how the marks ontent.	soning.	
	Indic	ative content:	Number of	Number of	B770 (7	Number of marks awarded for	
	IC1	Before closing S2, bulb 1 and bulb 2 have the same p.d./current so both bulbs have equal brightness	indicative marking	marks awarded for indicative marking points	Answer shows a coherent and logical structure with linkages	structure of answer and sustained line of reasoning	
	IC2	Closing switch S2 allows current to flow in bulb 3 <b>Or</b> Closing switch S2 places the same p.d. across bulb 3 as bulb 1.	6 5-4 3-2 1 0	4 3 2 1 0	and fully sustained lines of reasoning demonstrated throughout  Answer is partially structured with some linkages and lines of reasoning  Answer has no linkages between points and is	0	
	IC3	Bulb 1 and bulb 3 are in parallel, so the resistance of the combination decreases			the sum of marks for structure and line		
	IC4	The p.d. across bulb 1 (and bulb 3) decreases  Or The p.d. across bulb 2 increases	IC points	IC mark	Max linkage mark	Max final mark	
	IC5	The current in circuit/bulb 2 increases so the	6	4	2	6	
	103	brightness/power of bulb 2 increases	5	3	2	5	
		Or current in bulb 1 decreases so the brightness/	4	3	1	4	
		power of bulb 1 decreases	3	2	1	3	
		Or $P = \frac{V^2}{R}$ , so power of bulb 2 increases [power of	2	2	0	1	
		bulb 1 decreases]	0	0	0	0	
	IC6	(When S2 closed) bulb 1 is not as bright as bulb 2.				416 0 4	6

(Total for Question 3 = 6 marks)

Question Number	Acceptable Answer		Additional Guidance	Mark
4(a)	• Use of $V = \frac{4}{3}\pi r^3$	(1)		
	• Use of $pV = NkT$	(1)	Allow MP2 if temperature not converted to K	
	Temperature conversion to kelvin	(1)		
	• Use of $m = \frac{N}{6.02 \times 10^{23}} \times 4.00 \times 10^{-3} \text{ kg}$	(1)		
	$\bullet  m = 9.46 \times 10^{-3} \text{ kg}$	(1)	Example of calculation $V = \frac{4}{3}\pi r^3 = \frac{4}{3}\pi \times (4.36 \times 10^{-2} \text{ m})^3 = 3.47 \times 10^{-4} \text{ m}^3$ $N = \frac{pV}{kT} = \frac{1.65 \times 10^7 \text{ Pa} \times 3.47 \times 10^{-4} \text{ m}^3}{1.38 \times 10^{-23} \text{ J K}^{-1} \times (18.5 + 273) \text{ K}}$ $\therefore N = 1.42 \times 10^{24}$ $m = \frac{1.42 \times 10^{24}}{6.02 \times 10^{23}} \times 4.00 \times 10^{-3} \text{ kg} = 9.46 \times 10^{-3} \text{ kg}$	5
4(b)	<ul> <li>Upthrust on canister equals weight of air/fluid displaced.</li> </ul>	(1)		
	• Volume of canister stays constant, so upthrust on canister remains constant (and student X is incorrect)	(1)		
	• Mass of helium gas (in canister) decreases	(1)		
	Hence the weight will decrease (as helium is released) and student Y is correct	(1)	(Total for Question 4 -	4

(Total for Question 4 = 9 marks)

Question Number	Acceptable Answer		Additional Guidance	Mark
5(a)	Time a number of (complete) oscillations calculate a mean time period	(1)	Accept description of how to determine a mean – don't need to see the word "mean"	
	• This reduces the effect of random error (dependent on MP1)	(1)	Accept reaction time for random error, also accept reference to reducing percentage uncertainty	
	• Allow oscillation to settle before starting to time.	(1)		
	• Use a (fiducial) marker (so easier to see when trolley passes a point)	(1)		
	• Use the mid-point of the oscillation (for timing),	(1)	Accept equilibrium/undisplaced position	
	• Trolley is travelling fastest at mid-point, so effect of reaction time is reduced.	(1)	For MP6 allow use a datalogger to eliminate effect of reaction time [not dependent upon MP5]	6
5(b)	Substitutes into equation for mass on spring to give			
	$T = 2\pi \sqrt{\frac{M+m}{k}}$	(1)		
	$\bullet  T^2 = \frac{4\pi^2}{k}m + \frac{4\pi^2M}{k}$	(1)		
	• Identify gradient as $4\pi^2/k$ (and calculate a value for $k$ )	(1)		
	• Identify y-intercept as $4\pi^2 M/k$ (and calculate a value for M)	(1)		4

(Total for Question 5 = 10 marks)

Question Number	Acceptable Answer		Additional Guidance	Mark
6(a)	There are nodes and antinodes on the plate	(1)	Allow "points with minimum/zero amplitude" for "nodes" and "points with maximum amplitude" for	
	Sand is displaced away from the antinodes	(1)	"antinodes" Accept "displacement" for "amplitude"	
	Sand collected/gathers at the nodes	(1)		3
6(b)	• 1 full cycle read from oscilloscope trace 4.5 → 4.7 div	(1)	Example of calculation	
	Converts from div to s	(1)	1	
	• Use of $f = 1/T$	(1)	$f = \frac{1}{2.3 \times 10^{-3} \text{ s}} = 435 \text{ Hz}$ $v = 435 \text{ s}^{-1} \times 0.32 \text{ m} = 139 \text{ m s}^{-1}$	
	• Use of $v = f\lambda$	(1)		
	• $v = 140 \text{ m s}^{-1}$ , which is (much) less than 340 m s <sup>-1</sup>	(1)	Allow "the speed of sound in air" for 340 m s <sup>-1</sup>	5
6(c)	EITHER	(4)	A11 - 71 - 1 - 6 X - 1 - 1 / 6	
	• Plot a graph of L against 1/f	(1)	Allow Plot a graph of $L$ against $1/f$	
	$\bullet  L = \lambda/4$	(1)	4	
	• $L = \frac{v}{4f}$ , so speed of sound = 4 × gradient	(1)	$v = \frac{4}{\text{gradient}}$	
	OR	(4)		
	• (Calculate $\lambda$ using) $\lambda = 4 L$	(1)		
	• Plot a graph of $\lambda$ against $1/f$	(1)	Allow Plot a graph of $f$ against $1/\lambda$	
	• Speed of sound = gradient	(1)		3

(Total for Question 6 = 11 marks)

Question Number	Acceptable Answer		Additional Guidance	Mark
7(a)	Top line correct	(1)	$^{220}_{86}$ Rn $\rightarrow ^{216}_{84}$ Po $+ ^{4}_{2}\alpha$	
	Bottom line correct	(1)	200	2
7(b)	<ul> <li>Radon gas can be breathed in and can cause damage to living cells</li> <li>Or Once radon is inside the body the alpha particles/radiation can cause damage to living cells</li> </ul>	(1)	Accept the idea of damage e.g. causing mutations/cancer etc. Must have stated that this happens inside the body	
	<ul> <li>Because alpha (particles) highly ionising</li> </ul>	(1)		2
7(c)(i)	The alpha particles ionise the air (inside the chamber)  This particles ionise the air (inside the chamber)	(1)	If no other marks scored, allow MAX 1 for alpha particles are charged and attracted to (negative ) electrode	
	• This produces (moving) electrons inside the chamber	(1)	and current produced	2
7(c)(ii)	• Use of $\lambda = \frac{\ln 2}{t_{1/2}}$	(1)	Allow application of constant ratio rule	
	• Use of $A = A_0 e^{-\lambda t}$	(1)		
	• % activity remaining = 0.4 % (<1%), so claim is correct Or time to decay to 1% = 370 s (<450 s), so claim is correct	(1)	Example of calculation	3
			$\lambda = \frac{\ln 2}{55.6 \mathrm{s}} = 0.0125 \mathrm{s}^{-1}$	
			% activity remaining = $100e^{-0.0125 \text{ s}^{-1} \times 450 \text{ s}} = 0.37$	

(Total for Question 7 = 9 marks)

Question Number	Acceptable Answer	Additional Guidance	Mark
*8(a)	This question assesses a student's ability to show a coherent and logical structured answer with linkage and fully-sustained reasoning.  Indicative content:	Marks are awarded for indicative content and for how the answer is structured and shows lines of reasoning.  The following table shows how the marks should be awarded for indicative content.	
	IC1 Elastic P.E. (of the spring) is transferred to K.E. of the modelling clay	indicative marks awarded marking points seen in answer  answer  Answer shows a coherent and logical structure of indicages and fully sustained line of reasoning and fully sustained line sof	
	IC2 Clay has momentum before hitting the bob	5-4 3 throughout 3-2 2 Answer is partially structured with some linkages and lines of reasoning ternomatical 1 to 1 1 throughout 1 with some linkages and lines of reasoning ternomatical 1 throughout 1 through 1 throughout 1 th	
	IC3 Momentum is conserved when clay hits the bob  IC4 K.E. is transferred from the clay to the bob	Total marks awarded is the sum of marks for indicative	
	IC5 Collision is inelastic	Content and the marks for structure and lines of reasoning   IC points   IC mark   Max linkage   Max final mark   mark	
	Or K.E. is not conserved	6 4 2 6	
	<b>Or</b> In the collision (some) energy is transferred to thermal energy	5     3     2     5       4     3     1     4	
	to morniar onorgy	3 2 1 3	
	IC6 At the maximum height/displacement of the bob	2 2 0 2	
	all the K.E. (after the collision) has been transferred to gravitational P.E.	$egin{array}{ c c c c c c c c c c c c c c c c c c c$	
	The state of the s	(Accept responses in terms of energy stores model)	6

8(b)(i)	• Use of $T = 2\pi \sqrt{\frac{l}{g}}$	(1)	Example of calculation $T = 2\pi \sqrt{\frac{1.25 \text{ m}}{9.81 \text{ m/s}^{-2}}} = 2.24 \text{ s}$	
	<ul> <li>Time to reach maximum height = T/4</li> <li>Time to reach maximum height = 0.56 (s)</li> </ul>	(1) (1)	$T = 2\pi \sqrt{\frac{1.25 \text{ m}}{9.81 \text{ m s}^{-2}}} = 2.24 \text{ s}$ $t = \frac{T}{4} = \frac{2.24 \text{ s}}{4} = 0.56 \text{ s}$	3
8(b)(ii)	<ul> <li>Use of T = 2π√m/k</li> <li>m = 0.015 kg (ecf from (b)(i)) [show that value gives 0.018 kg]</li> </ul>	(1)	Example of calculation $2.24 \text{ s} = 2\pi \sqrt{\frac{m}{0.12 \text{ N m}^{-1}}}$ $\therefore m = \left(\frac{2.24 \text{ s}}{2\pi}\right)^2 \times 0.12 \text{ N m}^{-1} = 0.0153 \text{ kg}$	2
			$m = (\frac{1}{2\pi}) \times 0.12 \text{ N m}^{-1} = 0.0153 \text{ kg}$	

(Total for Question 8 = 11 marks)

Question Number	Acceptable Answer		Additional Guidance	Mark
9(a)(i)	MAX 3 • Intensity of light varies as an inverse square law Or reference to $I = \frac{P}{4\pi d^2}$	(1)		
	the light intensity would not increase uniformly (decreasing the distance as suggested)  The student should decrease the distance at decreasing	(1)		
	The student should decrease the distance at decreasing intervals	(1)		
	The student should use a greater range (of distances, as lamp is not a point source of light)	(1)		3
9(a)(ii)	An explanation that makes reference to the following points:			
	EITHER		Allow:	
	Carry out experiment under subdued lighting	(1)	Keep the intensity of the lamp constant  Or Keep angle of lamp constant	
	<ul> <li>As the ambient lighting will increase the ammeter reading [dependent upon MP1]</li> </ul>	(1)	As this would change the ammeter reading [dependent upon MP1	
	<ul> <li>OR</li> <li>Take readings at eye level</li> <li>As this will reduce parallax error [dependent upon MP3]</li> </ul>	(1) (1)		
	<ul> <li>OR</li> <li>Take multiple readings of intensity and calculate a mean</li> <li>As this will reduce the effect of <u>random</u> error [dependent upon MP5]</li> </ul>	(1) (1)		2

9(b)	An explanation that makes reference to the following points:	If no other marks scored, allow MAX 1 for resistance decreases and so current increases.	
	<ul> <li><u>Photons</u> incident upon LDR promoted electrons into conduction band</li> <li><u>Or photons</u> incident upon LDR released conduction electrons</li> </ul>	(1)	
	Number of free electrons (per unit volume) increases	(1) Accept "charge carriers" for "free electrons"	
	• Current $I = nqvA$ so the current increases Or $I \propto n$ so the current increases	(1)	3

(Total for Question 9 = 8 marks)


Question Number	Acceptable Answer		Additional Guidance	Mark
10(a)	<ul> <li>Use of a = (-)ω²x</li> <li>Use of v = ωA sin ωt</li> <li>ν<sub>max</sub> = 0.44 m s<sup>-1</sup>, so it is safe to oscillate at this amplitude</li> </ul>	(1) (1) (1)	No need to see $0.44 \text{ m s}^{-1} < 0.5 \text{ m s}^{-1}$ , as conclusion includes credit for the correct value of $v$ . $\frac{\text{Example of calculation}}{\omega = \sqrt{\frac{20.0 \text{ cm s}^{-2}}{5.0 \text{ cm}}}} = 2.0 \text{ s}^{-1}$ $v_{\text{max}} = 2.0 \text{ s}^{-1} \times 0.22 \text{ m} = 0.44 \text{ m s}^{-1}$	3
10(b)	<ul> <li>An explanation that makes reference to the following points:</li> <li>The (pushing) frequency must match the <u>natural</u> frequency</li> <li>The time period of oscillation increases, as T = 2π√m/k</li> <li>So the frequency of pushing must decrease [dependent upon MP2]</li> </ul>	(1) (1) (1)		3

(Total for Question 10 = 6 marks)

Question Number	Acceptable Answer		Additional Guidance	Mark
11(a)	An explanation that makes reference to the following points:			
	<ul> <li>When S is at end X, V is zero</li> <li>Or When S is at end Y, V equals supply (terminal) p.d.</li> </ul>	(1)		
	<ul> <li>The resistance (between X and S) is proportional to the length XS</li> <li>Or As S is moved towards Y the supply p.d. is divided</li> </ul>			
	in proportion to the resistance to the left and right of S	(1)		
	• V increases as the slider moves from X to Y	(1)	If both versions of MP1 given, then give MP3 too.	3
11(b)	An explanation that makes reference to the following points:			
	• (As <i>V</i> increases) <i>I</i> increases, so the temperature of the filament increases	(1)	Allow filament heats up for "temperature of filament increases"	
	• So the resistance of the filament increases (so the increase in current per unit increase in p.d. decreases)	(1)		2
11(c)(i)	An explanation that makes reference to the following points:			
	• Shows expansion $\log (T) = b \log V + \log a$	(1)		
	• Compares with $y = mx + c$ and states/indicates that the gradient is b (which is a constant)	(1)		2

11(c)(ii)	• Log values correct and to 2 or 3 decimal places [Allow either a consistent number of d.p. or s.f. in	(1)	V/V	T/K	$\log (V/V)$	log (T/K)		
	values for $\log V$ ]		5.03	1480	0.702	3.170		
			6.89	1680	0.838	3.225		
	<ul> <li>Labels and unit         [check correct representation of units on graph]</li> <li>Scales         [Must not be an awkward scale, points must be spread over at least half the graph grid]</li> </ul>	(1)	8.95	1850	0.952	3.267		
			11.11	2010	1.046	3.303		
		(1)	12.94	2140	1.112	3.330		
		( )	15.06	2280	1.178	3.358		
				ı	•	•	1	
	<ul> <li>Plots         [check the 2 points furthest from the line, if all points on line check any 2 points]</li> <li>Line of best fit         [If not all points on line, look for balanced spread of points above and below line]</li> </ul>	(1)	V/V	T/K	ln (V / V)	ln (T/K)		
			5.03	1480	1.615	7.300		
			6.89	1680	1.930	7.427		
		(1)	8.95	1850	2.192	7.523		5
			11.11	2010	2.408	7.606		
			12.94	2140	2.560	7.669		
			15.06	2280	2.712	7.732		
						I.	I	
11(c)(iii)	Gradient determined using large triangle	(1)	Example of cal	culation	<u>n</u>			
	• $b = 0.38 \rightarrow 0.40 (2 \text{ or } 3 \text{ sf})$	(1)	gradient = $\frac{3.3}{1.0}$	32 - 3.5	$\frac{18}{73} = 0.389$			2

(Total for Question 11 = 14 marks)

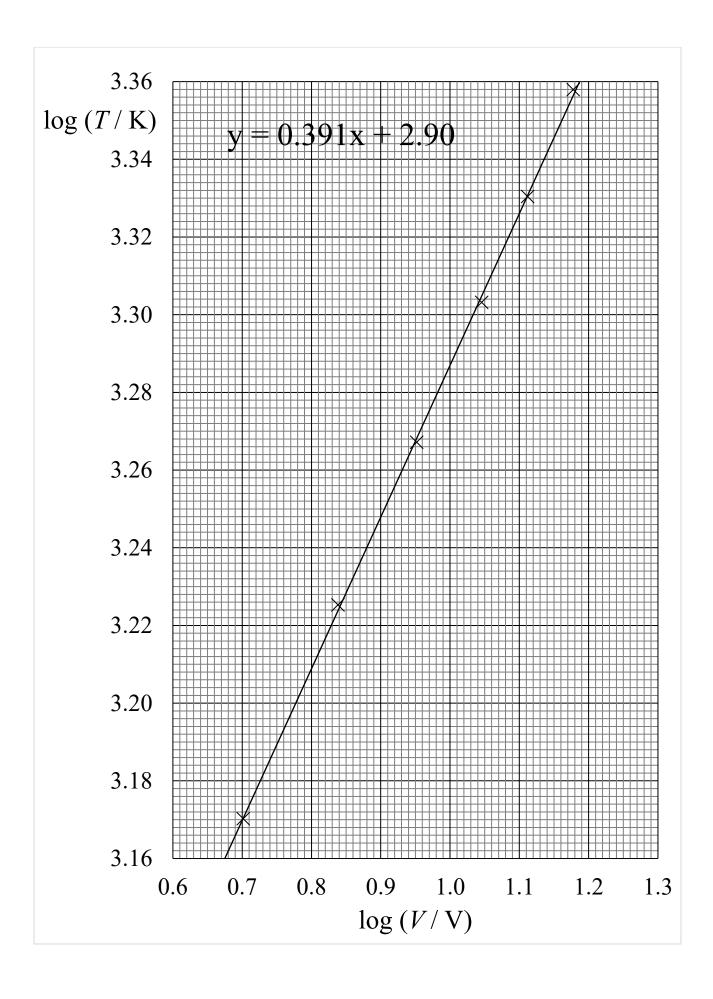

Question Number	Acceptable Answer		Additional Guidance	Mark
12(a)(i)	EITHER		Example of calculation	
	• Calculation of mean <i>t</i>	(1)	$t = \frac{(9.6 + 9.9 + 9.6) \text{ s}}{3} = 9.7 \text{ s}$	
	• Use of $s = ut$	(1)	$v = \frac{0.225 \text{ m}}{9.7 \text{ s}} = 0.0232 \text{ m s}^{-1}$	
	• Use of $v = \frac{2r^2g(\rho_B - \rho_C)}{9\eta}$ (1)		$\eta = \frac{2 \times (4.25 \times 10^{-3} \text{ m})^2 \times 9.81 \text{ m s}^{-2} \times (7750 - 1330) \text{ kg m}^{-3}}{9 \times 0.0232 \text{ m s}^{-1}}$ $\eta = 10.9 \text{ Pa s, so cocoa content is } 30\% \text{ (from graph)}$	
	<ul> <li>Cocoa content = 30%</li> <li>Or viscosity at 35% = 4.5 (Pa s)</li> </ul>			
	• Conclusion consistent with their graph value (1)		Cocoa content is 30% so not consistent  Or viscosity value is 4.5 Pa s so not consistent	
	OR			
	• Viscosity at 35% = 4.5 (Pa s)	(1)		
	• Use of $v = \frac{2r^2g(\rho_B - \rho_C)}{9\eta}$	(1)		
	• Use of $s = ut$ to calculate time to fall $T_{\text{fall}}$	(1)		
	• Calculation of mean <i>t</i>	(1)		
	• Conclusion consistent with calculated value of $T_{\text{fall}}$	(1)	Time taken would be 4.0 s so not consistent with mean time	5

(Total for Question 12 = 13 marks)

12(a)(ii)	<ul> <li>EITHER</li> <li>The temperature may not have been constant</li> <li>So the viscosity value would have varied</li> </ul>		If no other marks scored then allow MAX 1 for reference to ball not falling at terminal velocity	
	<ul><li>OR</li><li>There may have been reaction time error</li></ul>			
	Or There may have been parallax error in reading			
	the distance fallen by the ball	(1)		
	<ul> <li>So the velocity of the ball may have been inaccurate</li> <li>OR</li> </ul>	(1)		
	• There may have been an extra drag force (1)		Allow a reference to eddies <b>Or</b> turbulent flow	
	So terminal velocity would have been reduced	(1)		2
12(b)	• Use of $\Delta E = mc\Delta\theta$	<b>(1)</b>	Example of calculation	
	• Use of $\Delta E = mL$	(1)	$\Delta E = 0.065 \text{ kg} \times 3900 \text{ J kg}^{-1} \text{ K}^{-1} \times (32 - 15) \text{ K} = 4.31 \times 10^3 \text{ J}$	
	$\bullet  \Delta E_{\rm total} = \Delta E_c + \Delta E_L$	(1)	$\Delta E = 0.065 \text{ kg} \times 1.50 \times 10^5 \text{ J kg}^{-1} = 9.75 \times 10^3 \text{ J}$	
	Conversion between kcal and J	(1)	Energy to melt chocolate = $(4.31 \times 10^3 + 9.75 \times 10^3) \text{ J}$ = $1.41 \times 10^4 \text{ J}$	
	• Use of 15% to give $2.2 \times 10^5$ J	<b>(1)</b>	Energy released from chocolate = $345 \times 4200 \text{ J}$	
	Or energy required = 1%		= $1.45 \times 10^6 \text{ J}$ 15% of energy released = $0.15 \times 1.45 \times 10^6 \text{ J} = 2.17 \times 10^5 \text{J}$	
	Conclusion consistent with comparison of calculated values of energy released and 15% of required energy	(1)	So energy required to melt chocolate is much less than 15% of energy released.	6

**Total for Paper = 120 marks** 

